



VERTICAL BAND SAWS

HYDMECH

VW-18

Photos may show optional equipment.



OPTIONAL POWER TILT

Allows the operator to enter a desired angle up to 60° in either direction and have the machine automatically move the head to that angle. This option features an upgraded control, as pictured below.

ADJUSTABLE CANTED HEAD

The machine is capable of cutting with the saw head at 90° or with a 3° cant. It minimizes chip load resulting in a more efficient, quicker cut and longer blade life.



STANDARD FEATURES

- Adjustable 3° canted head
- Semi-automatic control
- Two full stroking hydraulic vises
- Manual precise head positioning from 60° left to 60° right
- Digital angle display w/ protractor
- Mechanically adjustable idler side guide arm
- On-demand hydraulics save energy
- 5 HP VFD. True direct blade drive
- Hydraulic positive down feed
- Cast iron band wheels
- Replaceable blade brush
- Robust steel base
- Easy access electrical panel and hydraulics
- Blade breakage switch
- Mechanical band tensioning with digital readout
- Replaceable carbide guide inserts
- 0.5 HP hydraulic pump provides system pressure

Machine shows optional power tilt

- Safety door interlocks
- Flood coolant with wash down hose
- Laser light and work light
- Variable vise pressure

OPTIONAL FEATURES

- Power tilt with programmable go to angle
- Chip bucket
- Hydraulic overhead bundling
- Mist lubrication
- Work stop
- Tall square vise inserts
- Power transformer
- Idler conveyors



STANDARD FEATURES

- Two full stroking hydraulic vises
- Select left or right side control panel
- Powered movable guide arm
- 7.5 HP VFD. True direct blade drive - no belts/pulleys
- Hydraulic positive down feed
- Replaceable blade brush
- Robust steel base
- Easy access electrical panel and hydraulics
- Blade breakage switch
- Hydraulic band tensioning with digital readout
- Replaceable carbide guide inserts
- Cast iron band wheels
- 2 HP hydraulic pump provides system pressure
- Safety door interlocks
- Flood coolant with wash down hose

- Laser light
- Work light
- Variable vise pressure
- Automatic programmable mitering with “go to” angle functionality from 45° left to 45° right

OPTIONAL FEATURES

- Fixed 6° canted head
- Chip bucket
- Hydraulic overhead bundling
- Mist lubrication
- Pop-up lift rollers
- Drag chain chip conveyor
- Tall square vise inserts
- Hydraulic chip conveyor
- Idler conveyors
- Powered conveyors

V-18-45

TWO FULL STROKING HYDRAULIC VISES

Securing the material with hydraulic pressure results in better blade life, increased operator safety and a decreased risk of the material moving during the cut. Keeping the material secure reduces the chance of stripping the teeth on the saw blade.

POWERED MOVEABLE GUIDE ARM

Allows for quick adjustment of the guide arm ensuring rigidity of the blade during the cut, maximizing blade life and performance.

7.5 HP TRUE DIRECT DRIVE

The motor and gear box are bolted together. This results in better transfer of power between the two moving parts. Other benefits include lower maintenance costs, better torque, and less vibration resulting in better blade life.

VARIABLE VISE PRESSURE

Allows for adjustment of the clamping pressure of the vises. Ideal for cutting thin wall tubing and other light material applications in which a high vise pressure may deform the material.



Photos may show optional equipment.

V-18-60



STANDARD FEATURES

- Two full stroking hydraulic vises
- Select left or right side control panel
- Powered movable guide arm
- 7.5 HP VFD. True direct blade drive - no belts/pulleys
- Hydraulic positive down feed
- Replaceable blade brush
- Robust steel base
- Easy access electrical panel and hydraulics
- Blade breakage switch
- Hydraulic band tensioning with digital readout
- Replaceable carbide guide inserts
- Cast iron band wheels
- 2 HP hydraulic pump provides system pressure
- Safety door interlocks
- Flood coolant with wash down hose
- Laser light
- Work light
- Variable vise pressure
- Automatic programmable mitering with "go to" angle functionality from 60° left to 60° right

OPTIONAL FEATURES

- Fixed 6° canted head
- Chip bucket
- Hydraulic overhead bundling
- Mist lubrication
- Pop-up lift rollers
- Drag chain chip conveyor
- Tall square vise inserts
- Hydraulic chip conveyor
- Idler conveyors
- Powered conveyors
- High speed roller guide blocks
- Rollers
- Saw guide brackets
- Tungsten carbide single faced saw guide inserts
- Hardened tool steel reversible saw guide inserts

TWO FULL STROKING HYDRAULIC VISES

Securing the material with hydraulic pressure results in better blade life, increased operator safety and a decreased risk of the material moving during the cut. Keeping the material secure reduces the chance of stripping the teeth on the saw blade.

POWERED MOVEABLE GUIDE ARM

Allows for quick adjustment of the guide arm ensuring rigidity of the blade during the cut, maximizing blade life and performance.

7.5 HP TRUE DIRECT DRIVE

The motor and gear box are bolted together. This results in better transfer of power between the two moving parts. Other benefits include lower maintenance costs, better torque, and less vibration resulting in better blade life.

VARIABLE VISE PRESSURE

Allows for adjustment of the clamping pressure of the vises. Ideal for cutting thin wall tubing and other light material applications in which a high vise pressure may deform the material.



Photos may show optional equipment.



STANDARD FEATURES

- You choose left or right side infeed
- Automatic programmable mitering with “go to” angle functionality from 60° left to 60° right
- Four full stroking hydraulic vises (feed, main, and outboard) and squaring vise
- 8.5” Mitsubishi FX5U PLC color touch screen controller. No flipping from screen-to-screen, the control is interactive with messages for the operator that reduces the learning curve. User Friendly Graphical Icon programming for miter cutting, 1000 jobs, 20 jobs in queue
- Automatic multi-indexing up to 40” in a single stroke
- Powered movable guide arm
- Hydraulic overhead bundling
- 7.5 HP VFD. True direct blade drive – no belts/pulleys
- Hydraulic DDF system
- Blade chamber separates material from cut part
- Out of stock switch
- Cast iron band wheels
- Replaceable blade brush

- Robust steel base
- Easy access electrical panel and hydraulics
- Blade breakage switch
- Drag chain chip conveyor
- Hydraulic band tensioning with digital readout
- Replaceable carbide guide inserts
- 2 HP hydraulic pump provides system pressure
- Safety door interlocks
- Flood coolant with wash down hose
- Laser light and work light
- Variable vise pressure
- 3 degree head cant

OPTIONAL FEATURES

- Chip bucket
- Mist lubrication
- Non-driven pop-up lift roller
- Tall square vise inserts
- Hydraulic chip conveyor
- Idler & powered conveyors

V-18APC-60

AUTOMATIC MULTI-INDEXING

Shuttle features automatic multi-indexing up to 40" in a single stroke with automatic kerf compensation. V-18APC-60 can be built with a left or right side infeed at no additional charge.

BLADE CHAMBER

This feature allows the operator to run the machine unattended without the possibility of the blade catching on the material as the head retracts. Without this feature blade can be damaged including blade guard, saw table, and guides.

HYDRAULIC POSITIVE DOWNFEED

The DDF system (dual down feed system) has the capability of controlling both feed rate and feed force parameters to achieve optimum cutting results, and blade life.



Photos may show optional equipment.

V-20

WINDOWS TOUCH SCREEN CONTROLLER


Operates the automatic cycle but allows for manual operation as well. A variety of languages can be chosen for message screen display.

OPTIONAL OVERHEAD BUNDLING

A hydraulically powered overhead clamp moves down on the material. This option is very effective, and necessary for bundle cutting various material shapes and sizes.

EASY ACCESS ELECTRICAL PANEL

The electrical components are housed in a compartment on the front of the machine. Components are neatly laid out and labeled for easy troubleshooting.

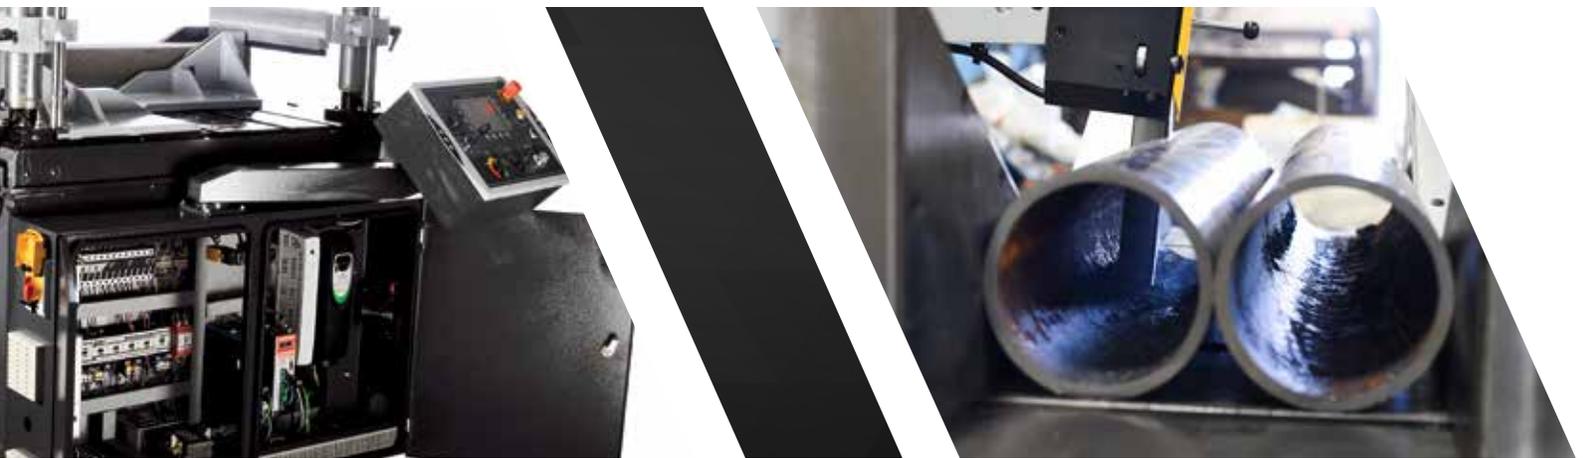

Photos may show optional equipment.



STANDARD FEATURES

- 4° canted head allows for efficient cutting and improved blade life
- Cast iron, torsion free saw head provides durability, stiffness, and absorbs vibrations
- On-demand hydraulics save energy
- High efficiency, constant torque electric ball screw feed system
- Automatic programmable mitering with “go to” angle functionality from 60° left to 60° right
- Semi-automatic touch screen NC controller
- Two full stroking hydraulic vises
- Electronic ball screw powered, guide arm
- 10 HP VFD. True direct blade drive - no belts/pulleys
- Cast iron band wheels
- Replaceable blade brush
- Robust steel base
- Variable vise pressure
- Easy access electrical panel and hydraulics

- Electric chip conveyor
- Blade breakage switch
- Electronic band tensioning provides consistent, automatic blade tension
- Replaceable carbide guide inserts
- 2 HP hydraulic pump provides system pressure
- Safety door interlocks
- Flood coolant with wash down hose
- Laser light
- Work light
- Mist lubrication

OPTIONAL FEATURES

- Hydraulic overhead bundling
- Tall square vise inserts
- Remote console
- Chip bucket with pump
- Idler conveyors
- Powered conveyors



STANDARD FEATURES

- 4° canted head allows for efficient cutting and improved blade life
- 60" bar feed, left side
- Shuttle features automatic multiindexing up to 60" (120" optional) in a single stroke with automatic kerf compensation
- Powered by a rack and pinion servo drive
- 10 HP VFD. True direct blade drive – no belts/pulleys
- 8.5" Mitsubishi FX5U PLC color touch screen controller. No flipping from screen-to-screen, the control is interactive with messages for the operator that reduces the learning curve. User Friendly Graphical Icon programming for miter cutting, 1000 jobs, 20 jobs in queue
- Cast iron band wheels
- Hydraulic DDF system
- Two full stroking hydraulic vises
- Hydraulically powered, programmable guide arm attached to saw column
- Blade chamber separates material from cut part
- Blade breakage switch Easy access electrical panel and hydraulics
- Hydraulic head tilt
- Hydraulic chip conveyor
- Replaceable blade brush
- Robust steel base
- Out of stock switch
- Variable vise pressure
- Automatic programmable mitring with "go to" angle functionality from 60° left to 60° right
- Pop-up feed roller – one, opposite bar feed
- Hydraulic band tensioning with digital readout
- Replaceable carbide guide inserts
- Safety door interlocks
- Laser light
- Work light
- 3 HP hydraulic pump provides system pressure
- Flood coolant with wash down hose

OPTIONAL FEATURES

- Chip bucket with pump
- Full capacity hydraulic overhead bundling
- Mist lubrication
- Tall square vise inserts
- Out feed vise
- Out feed vise bundling
- Right side infeed shuttle
- 10' shuttle infeed
- Bridge/interface bracket
- Powered bridge/ interface bracket
- Idler conveyors
- Powered conveyors

V-21/APC60

AUTOMATIC HYDRAULIC POWERED MITERING

Mitering from 60 degrees left to 60 degrees right. The control panel features a digital angle display. Head tilt is controlled hydraulically.

AUTOMATIC MULTI-INDEXING

Indexes material quickly and accurately, up to 60" or 120" optional in a single stroke. Shuttle carriage moves on linear bearings and is driven by a rack and pinion servo motor.x

GRAPHICAL ICON PROGRAMMING

User friendly, graphic icon programming makes programming angles simple for the operator.

10 HP BLADE DRIVE

The Motor and Gear box are bolted together. This results in better transfer of power between the two moving parts. Other benefits include lower maintenance costs, better torque, and less vibration resulting in better blade life.



Photos may show optional equipment.

V-25



10 HP DIRECT BLADE DRIVE

Heavy-duty 2-stage gearbox and motor is controlled by an AC inverter drive. Blade speed is easily adjusted with a wide range of band speeds. Less moving parts compared to belt and pulley drive machines.

OPTIONAL MIST LUBRICATION

An alternative to the standard flood coolant system, mist lubrication is an air mist system providing blade lubrication and cooling. No recovery is required as the mist evaporates.





STANDARD FEATURES

- 6° canted head allows for efficient cutting and improved blade life
- 8.5" Mitsubishi FX5U PLC color touch screen controller. No flipping from screen-to-screen, the control is interactive with messages for the operator that reduces the learning curve. User Friendly Graphical Icon programming for miter cutting, 1000 jobs, 20 jobs in queue
- Control provides hydraulic powered mitering from 60° left to 60° right
- Digital angle display
- Two full stroking hydraulic vises
- Hydraulically powered guide arm attached to saw column. In automatic mode, programmable guide arm adjusts to material height when mitering, providing optimum blade support and minimum blade exposure.
- 10 HP VFD. True direct blade drive - no belts/pulleys
- Cast iron band wheels
- Replaceable blade brush
- Robust steel base
- Easy access electrical panel and hydraulics
- Blade breakage switch

- Hydraulic band tensioning with digital readout
- Replaceable carbide guide inserts
- 3 HP hydraulic pump provides system pressure
- Safety door interlocks
- Flood coolant with wash down hose
- Laser light
- Work light
- Variable vise pressure

OPTIONAL FEATURES

- Chip bucket with pump
- Hydraulic overhead bundling
- Mist lubrication
- Pop-up feed roller
- Tall square vise inserts
- Hydraulic chip conveyor
- Datum line vertical rollers
- Bridge/interface bracket
- Powered bridge/interface bracket
- Idler conveyors
- Powered conveyors



STANDARD FEATURES

- 6° canted head allows for efficient cutting and improved blade life
- 60" bar feed, left side
- Shuttle features automatic multi-indexing up to 60" (120" optional) in a single stroke with automatic kerf compensation. Powered by a rack and pinion servo drive.
- Automatic programmable mitering with "go to" angle functionality from 60° left to 60° right
- Hydraulic head tilt
- Cast iron band wheels
- 8.5" Mitsubishi FX5U PLC color touch screen controller. No flipping from screen-to-screen, the control is interactive with messages for the operator that reduces the learning curve. Programmable up to 1000 jobs with 20 in queue.
- Two full stroking hydraulic vises
- Hydraulically powered, programmable guide arm attached to saw column
- 10 HP VFD. True direct blade drive
- Blade chamber separates material from cut part
- Hydraulic chip conveyor efficiently removes chip from saw
- Replaceable blade brush
- Robust steel base

- Out of stock switch
- Blade breakage switch
- Easy access electrical and hydraulics
- Pop-up feed roller
- Hydraulic band tensioning with digital readout
- Replaceable carbide guide inserts
- 3 HP hydraulic pump provides system pressure
- Safety door interlocks
- Flood coolant with wash down hose
- Laser light & work light
- Variable vise pressure

OPTIONAL FEATURES

- Chip bucket with pump
- Hydraulic overhead bundling
- Mist lubrication
- Tall square vise inserts
- Out feed vise
- Right side infeed shuttle
- 10' shuttle infeed
- Bridge/interface bracket (powered and unpowered)
- Idler & powered conveyors

V-25APC



PROGRAMMABLE GUIDE ARM

Hydraulically powered moveable guide arm attached to saw column. In automatic mode, programmable guide arm adjusts to material height when mitering, providing optimum blade support and minimum blade exposure.

60" BAR FEED

Fast shuttle vise is capable of indexing up to 60" (120" optional) in a single stroke. Shuttle carriage moves on linear rails and is driven by rack & pinion mounted gear reducer/servo motor assembly.



Photos may show optional equipment.

SPECIFICATIONS

		VW-18	V-18-45	V-18-60	V-18APC-60
Rectangular Capacity (h x w)	90°	22" x 18" / 20 3/4" x 18" cant. head 558 mm x 457 mm / 527 mm x 457 mm cant. head	31" x 18" / OH Bund. 12" x 18" / 29" x 18" cant. head 787 mm x 457 mm / OH Bund. 305 mm x 457 mm / 737 mm x 457 mm cant. head	18" x 23" / OH Bund. 18" x 12" / 18" x 22" cant. head 457 mm x 584 mm / OH Bund. 457 mm x 305 mm / 457 mm x 559 mm cant. head	22" x 18" / OH Bund. 12" x 18" 559 mm x 457 mm / OH Bund. 305 mm x 457 mm
	45°	15" x 18" / 14" x 18" cant. head 381 mm x 457 mm / 355 mm x 457 mm cant. head	21" x 18" / OH Bund. 12" x 18" / 20" x 18" cant. head 533 mm x 457 mm / OH Bund. 305 mm x 457 mm / 508 mm x 457 mm cant. head	18" x 16" / OH Bund. 18" x 12" / 18" x 14.75" cant. head 457 mm x 406 mm / OH Bund. 457 mm x 305 mm / 457 mm x 375 mm cant. head	14.75" x 18" / OH Bund. 12" x 18" 375 mm x 457 mm / OH Bund. 305 mm x 457 mm
	60° Right	10 1/4" x 18" / 9 1/2" x 18" cant. head 260 mm x 457 mm / 241 mm x 457 mm cant. head	N/A	18" x 10" / OH Bund. 18" x 6" / 18" x 9" cant. head 457 mm x 254 mm / OH Bund. 457 mm x 152 mm / 457 mm x 228 mm cant. head	9" x 18" / OH Bund. 6" x 18" 228 mm x 457 mm / OH Bund. 152 mm x 457 mm
	60° Left	10 1/4" x 18" / 9 1/2" x 18" cant. head 260 mm x 457 mm / 241 mm x 457 mm cant. head	N/A	18" x 10" / OH Bund. 18" x 6" / 18" x 9" cant. head 457 mm x 254 mm / OH Bund. 457 mm x 152 mm / 457 mm x 228 mm cant. head	9" x 18" / OH Bund. 6" x 18" 228 mm x 457 mm / OH Bund. 152 mm x 457 mm
Round Capacity	90°	17 1/2" 445 mm	18" (with tall vise) / OH Bund. 12" / 18" (with all vise) cant. head 457 mm (with tall vise) / OH Bund. 305 mm / 457 mm (with all vise) cant. head	18" (with tall vise) / OH Bund. 12" / 18" cant. head 457 mm / OH Bund. 305 mm / 457 mm cant. head	18" / OH Bund. 12" 457 mm / OH Bund. 305 mm
	45°	12 1/2" 318 mm	12" / OH Bund. 12" / 12" cant. head 305 mm / OH Bund 305 mm / 305 mm cant. head	13" / OH Bund. 12" / 13" cant. head 330 mm / OH Bund. 305 mm / 330 mm	13" / OH Bund. 12" 330 mm / OH Bund. 305 mm
	60° Right	10 1/4" / 9 1/2" cant. head 260 mm / 241 mm cant. head	N/A	10" / OH Bund. 6" / 9" cant. head 254 mm / OH Bund. 152mm / 228 mm cant. head	9" / OH Bund. 6" / 228 mm / OH Bund. 152 mm
	60° Left	10 1/4" / 9 1/2" cant. head 260 mm / 241 mm cant. head	N/A	10" / OH Bund. 6" / 9" cant. head 254 mm / OH Bund. 152mm / 228 mm cant. head	9" / OH Bund. 6" / 228 mm / OH Bund. 152 mm
Blade Drive		5 HP VFD / 3.7 kW VFD	7.5 HP VFD / 5.5 kW	7.5 HP VFD / 5.5 kW	7.5 HP VFD / 5.5 kW
Blade Speed		65-385 SFM / 20-117 MPM	65-385 SFM / 20-117 MPM	65-385 SFM / 20-117 MPM	65-385 SFM / 20-117 MPM
Blade Size		1 1/4" x 16' 3" / 32 mm x 4953 mm	1 1/4" x 16' 11" / 32 mm x 5156 mm	1 1/4" x 16' 11" / 32 mm x 5156 mm	1 1/4" x 16' 11" / 32 mm x 5156 mm
Automatic Shuttle Multi-Indexing		N/A	N/A	N/A	40" / 1016 mm
Coolant Tank Capacity		12 Gal. / 45 ltr	8 Gal. / 30 ltr	8 Gal. / 30 ltr	30 Gal. / 114 ltr
Table Height		36 1/2" / 927 mm	44" / 1117 mm	44" / 1117 mm	44" / 1117 mm
Voltages Available		240 or 480 v (208,575 optional)	208, 240, 480, 575 v	208, 240, 480, 575 v	208, 240, 480, 575 v
Weight		2,700 lbs. / 1225 kg	4,800 lbs. / 2177 kg	4,800 lbs. / 2177 kg	9,000 lbs. / 4082 kg
Dimensions	Width	36" / 914 mm	98" / 2489 mm	98" / 2489 mm	120" / 3048 mm
	Length	95" / 2413 mm	120" / 3048 mm	120" / 3048 mm	188" / 4775 mm
	Height	96" / 2438 mm	123" / 3124 mm	112" / 2845 mm	112" / 2845 mm

		V-20	V-21/26APC	V-25	V-25APC
Rectangular Capacity (h x w)	90°	25" x 20" 635 mm x 508 mm	26" x 21" / 22" x 21" w/bund 660 mm x 533 mm / 558 x 533 w/bund	30" x 25" 762 mm x 635 mm	30" x 25" 762 mm x 635 mm
	45° Right	17" x 20" 431 mm x 508 mm	18" x 21" / 15.5" x 21" w/bund 457 mm x 533 mm / 394 mm x 533 mm w/bund	21" x 25" 533 mm x 635 mm	21" x 25" 533 mm x 635 mm
	45° Left	17" x 20" 431 mm x 508 mm	18" x 21" / 15.5" x 16.5" w/bund 457 mm x 533 mm / 394 mm x 419 mm w/bund	21" x 25" 533 mm x 635 mm	21" x 25" 533 mm x 635 mm
	60° Right	11 1/4" x 20" 285 mm x 508 mm	12 1/2" x 21" / 7" x 21" w/bund 317 mm x 533 mm / 178 mm x 533 mm w/bund	14 1/2" x 25" 368 mm x 635 mm	14 1/2" x 25" 368 mm x 635 mm
	60° Left	11 1/4" x 20" 285 mm x 508 mm	11" x 21" / 7" x 16.5" w/bund 279 mm x 533 mm 178 mm x 419 w/bund	13 1/2" x 25" 342 mm x 635 mm	13 1/2" x 25" 342 mm x 635 mm
Round Capacity	90°	20" / 508 mm	21" / 533 mm	25" / 635 mm	25" / 635 mm
	45°	17" / 432 mm	17" / 432 mm	21" / 533 mm	21" / 533 mm
	60° Right	11 1/4" / 285 mm	12" / 305 mm	14 1/2" / 368 mm	14 1/2" / 368 mm
	60° Left	11 1/4" / 285 mm	11" / 279 mm	13 1/2" / 342 mm	13 1/2" / 342 mm
Blade Drive		10 HP VFD / 7.4 kW VFD	10 HP VFD / 7.4 kW VFD	10 HP VFD / 7.4 kW VFD	10 HP VFD / 7.4 kW VFD
Blade Speed		65-400 SFM / 20-122 MPM	65-385 SFM / 20-117 MPM	75-350 SFM / 23-107 MPM	75-350 SFM / 23-107 MPM
Blade Size		1 1/2" x 19' 3" / 38.1 mm x 5867 mm	1 1/2" x 19' 4" / 38.1 mm x 5893 mm	1 1/2" x 21' 0.5" / 38.1 mm x 6413.5 mm	1 1/2" x 21' 0.5" / 38.1 mm x 6413.5 mm
Automatic Shuttle Multi-Indexing		N/A	60" (120" optional) 1524 mm (3048 mm optional)	N/A	60" (120" optional) 1524 mm (3048 mm optional)
Coolant Tank Capacity		20 Gal. / 76 ltr	32 Gal. / 121 ltr	38 Gal. / 144 ltr	38 Gal. / 144 ltr
Table Height		44" / 1117 mm	44" / 1117 mm	44" / 1117 mm	44" / 1117 mm
Voltages Available		480 v (208, 240, 575 n/c trans.)	208*, 240*, 480, 575* v	208, 240, 480, 575 v	240 or 480 v (208, 575 n/c trans)
Weight		4,200 lbs. / 1905 kg	14,700 lbs. / 6668 kg	10,000 lbs. / 4536 kg	15,000 lbs. / 6804 kg
Dimensions	Width	70" / 1178 mm	181" / 4597 mm	96" / 2438 mm	158" / 4013 mm
	Length	128" / 3251 mm	184" / 4674 mm	160" / 4064 mm	254" / 6451 mm
	Height	112" / 2844 mm	112" / 2844 mm	123" / 3124 mm	123" / 3124 mm

*transformer supplied at no charge

In line with HYDMECH's policy of on-going product improvement, we reserve the right to modify features and specifications.



RELIABLE SAWS. RELIABLE PEOPLE.

877-276-SAWS www.HYDMECH.com

Dealer Information: